PDS-GS1202T-WL

12.1' industrial display



Features:

12.1" LCD with capacitive touchscreen

resolution 1024*768

■ 1*VGA、1*HD、1*DVI


1*menu control button

Specifications:

Display			
LCD panel	12.1" LCD	Contrast ratio	1000：1
resolution	1024*768	Aspect ratio	4：3
brightness	350 cd/m²		
touchscreen			
touchscreen type	capacitive touchscreen	Hardness	⩾6H
Light transmission	⩾85%		
Interface			
VGA	1*VGA	Power connector	DC power input (optional Circular connector)
HD	1*HD	headphone jack	1*line-out+1 mic-in
DVI	1*DVI	USB	4pin circular connector for the touchscreen; requires a cable
OSD languages			
Menu languages	Chinese, English, German, French, Italian, Korean, Portuguese		
Power			
power input	12VDC input (9~36V wide-voltage module optional, standard 12/2A power adapter)		

Environment			
Vibration	5-19Hz/1.0mm amplitude; 19-200Hz/1.0g acceleration	Operating temp.	-10°C~60°C airflow over surface
Shock	10g acceleration, 11ms duration	Storage temp.	-20°C~70°C
Reliability	MTBF≥30000h; MTTR≤0.5h	Operating humidity	95%@40°C, non-condensing
IP rating	Front panel IP65		
Physical			
Dimensions (L x W x H)	291*230*45mm	Material	Aluminum alloy panel; all-metal design
Weight	2.11kg/3.4kg(net/gross)	Mounting	VESA mounting:100*100mm, 75*75mm
Color	Black		Panel cutout:274.9*214.2mm

Dimensions:

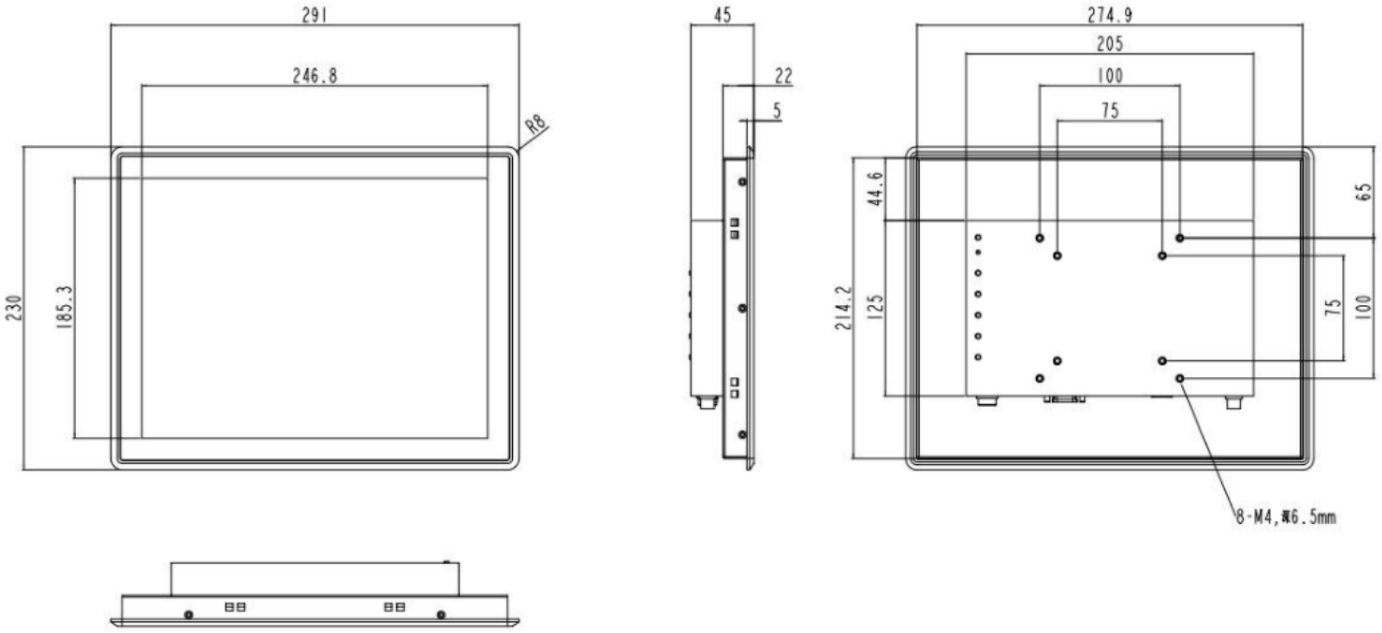

Accessories (Circular connector USB cable):

