PDS-GS1501T-SF

15" rugged industrial panel display



Features:

15"TFT LED LCD

integrated capacitive touchscreen

Robust all-aluminum structure for a broad range of applications

Long service life and high reliability

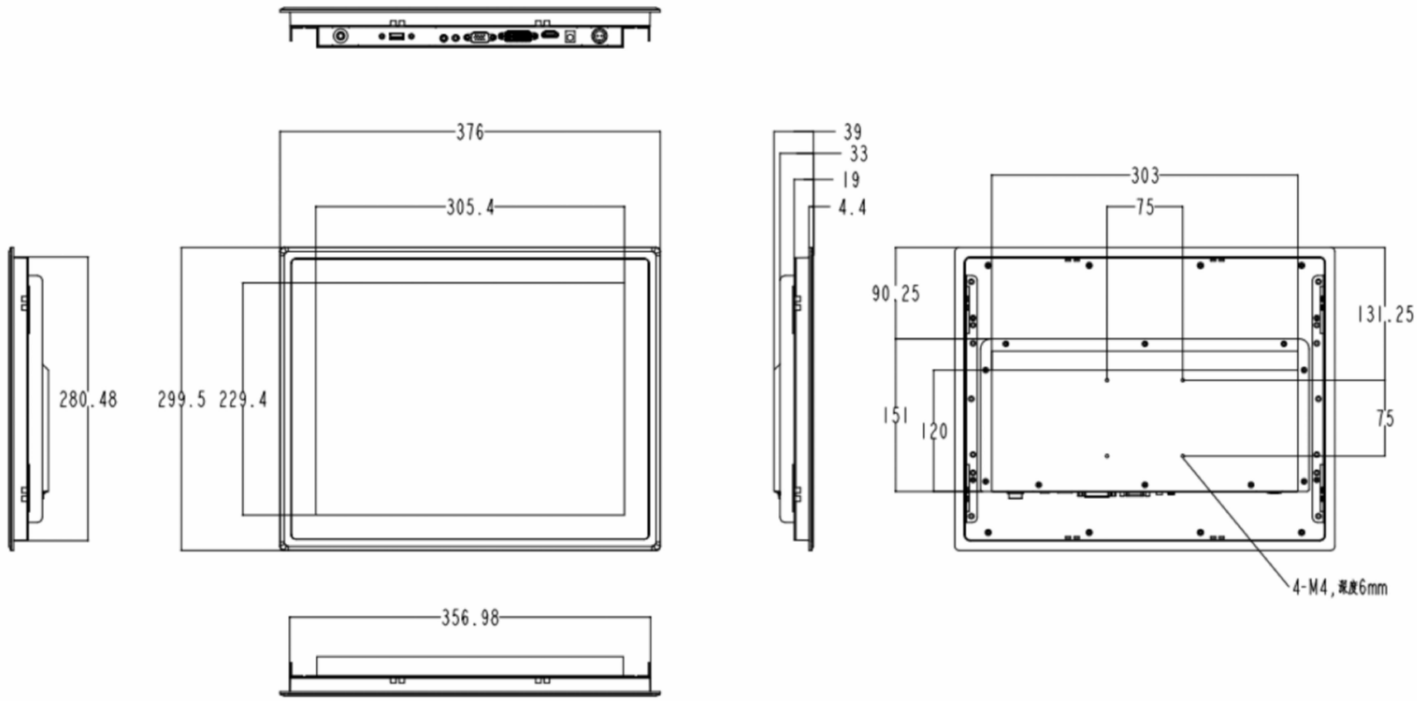
Fast response without trailing or flicker

Wide viewing angle for clear images at oblique angles

Specifications:

Display			
Display	15″ TFT LED	Contrast ratio	1000：1
resolution	1024*768	touchscreen	capacitive touchscreen
brightness	350 cd/m²	Display input	VGA HD DVI
Power			
Power	100~240VAC/50~60Hz(with adapter)/12V DC input		
I/O interfaces			
USB	Touchscreen interface		
Environmental tests			
Vibration	5-19Hz/1.0mm amplitude; 19-200Hz/1.0g acceleration	Operating temp.	-10°C～60°C
Shock	10g acceleration, 11ms duration	Storage temp.	-20°C ～70°C
Reliability	MTBF≥50000h; MTTR≤0.5h	Operating humidity	95%@40°C, non-condensing
IP rating	Front panel IP65 (optional)		
Physical			
Dimensions (L x W x H)	376*299.5*39mm	Material	Aluminum alloy panel; fanless design
Weight	1.0kg/2.1kg(net/gross)	Color	Black

Dimensions:


376
305.4
280.48
299.5
229.4
356.98
39
33
19
4.4
303
75
90.25
131.25
151
120
75
4-M4,深度6mm