
PDS-GS1502C-FE

15.6" LCD



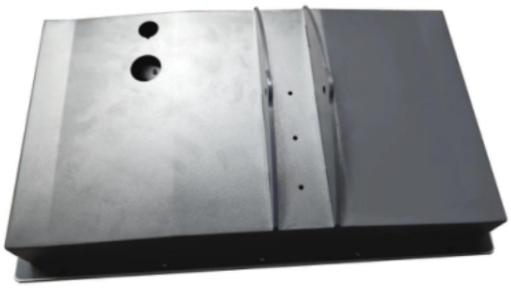

Features:

15.6" industrial LCD

Display resolution 1920*1080

10-point capacitive touchscreen

■ 1*VGA、1*HD、1*DVI、1*USB2.0

customer-customized housing

Specifications:

Display			
Display	15.6" IPS LCD	Contrast ratio	800:1
resolution	1920*1080	Aspect ratio	16:9
brightness	450cd/m²	touchscreen	capacitive touchscreen (with customer-customized LOGO)
Power			
Power	9-36V wide-voltage input (Phoenix terminal interface)		
I/O interfaces			
VGA	1*VGA	Power connector	Phoenix terminal 2PIN interface
HD	1*HD	Audio	1*line-out+1*mic-in
DVI	1*DVI	USB	1*USB 2.0(touchscreen)
Environmental tests			
Vibration	5-19Hz/1.0mm amplitude; 19-200Hz/1.0g acceleration	Operating temp.	-10°C~60°C airflow over surface
Shock	10g acceleration, 11ms duration	Storage temp.	-20°C~70°C
Reliability	MTBF≥30000h; MTTR≤0.5h	Operating humidity	95%@40°C, non-condensing
IP rating	Front panel IP65		
Physical			
Dimensions (L x W x H)	495.8*305*120.5mm	Material	Aluminum alloy panel; all-metal design
Weight	6.9kg/7.6kg(net/gross)	Mounting	Custom bracket mounting
Color	Black + Gray		

OSD languages

Menu languages	English

Dimensions:

