PDS-GS1502C

15.6" LCD



Features:

15.6" industrial LCD

Display resolution 1920*1080

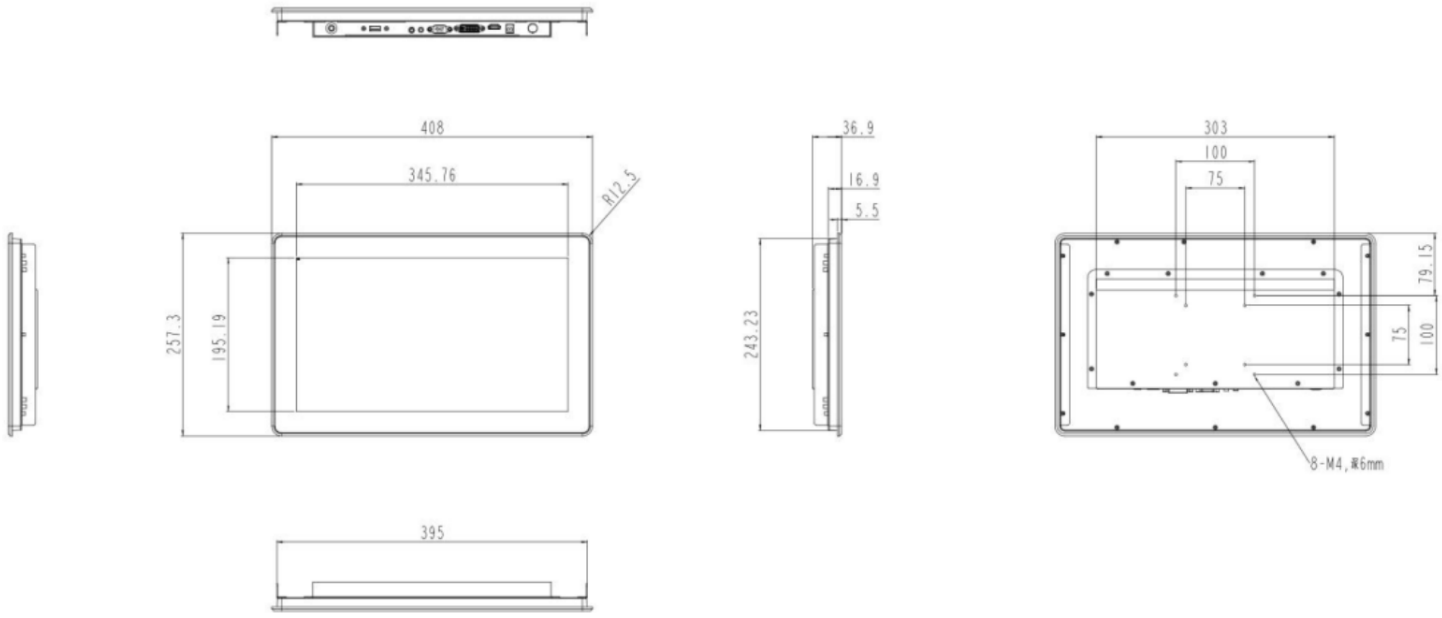
10-point capacitive touchscreen

■ 1*VGA、1*HD、1*DVI、1*USB2.0

Specifications:

Display			
Display	15.6'' IPS LCD	Contrast ratio	800：1
resolution	1920*1080	Aspect ratio	16：9
brightness	450cd/m²	touchscreen type	capacitive touchscreen
I/O interfaces			
VGA	1*VGA	Power connector	DC circular connector
HD	1*HD	Audio	1*line-out+1*mic-in
DVI	1*DVI	USB	1*USB 2.0(touchscreen)
Power			
power input	12VDC circular-connector input (9~36V wide-voltage module optional, standard 12/5A power adapter)		
Environmental tests			
Vibration	5-19Hz/1.0mm amplitude; 19-200Hz/1.0g acceleration	Operating temp.	-10°C~60°C airflow over surface
Shock	10g acceleration, 11ms duration	Storage temp.	-20°C ~70°C
Reliability	MTBF≥30000h; MTTR≤0.5h	Operating humidity	95%@40°C, non-condensing
IP rating	Front panel IP65		
Physical			
Dimensions (L x W x H)	408*257.3*36.9mm	Material	Aluminum alloy panel; all-metal design
Weight	2.07kg/2.45kg(net/gross)	Mounting	VESA mounting:75*75mm, 100*100mm
Color	Black		Panel cutout:395*243mm

Dimensions:


408
345.76
R12.5
257.3
195.19
36.9
16.9
5.5
243.23
303
100
75
79.15
75
100
8-M4,深6mm
395