
PDS-GS1701T

Product image



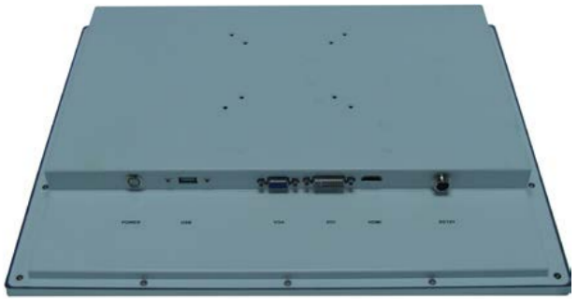

Features:

- 17″ industrial display, resistive touchscreen
- High-strength aluminum alloy panel; sealed, fanless, dust-resistant design
- 1*VGA, 1*HDMI, 1*DVI, 1*USB2.0
- Panel color: Silver / Black optional

Product specifications:

Display	Display	17″ TFT LED
	resolution	1280*1024
	brightness	250 cd/m2
	Contrast ratio	1000:1
	touchscreen	resistive touchscreen
Power	Power	100~240V AC/50~60Hz(with adapter)/12V DC power input
	Power consumption	8W(standby);
I/O interfaces	USB	1*USB 2.0 touch interface
	Display	1*VGA,1*HDMI,1*DVI
Environmental tests	Vibration	5-19Hz/1.0mm amplitude; 19-200Hz/1.0g acceleration
	Shock	10g acceleration, 11ms duration
	IP rating	Front panel IP65 (optional)
	Reliability	MTBF≥50000h; MTTR≤0.5h
	Operating temp.	-10°C~50°C @ 5 ~ 85% RH. airflow
	Storage temp.	-20°C ~60°C
	Operating humidity	95% @40°C, non-condensing
Physical	Dimensions	400 mm (L) *320 mm (W) *41 mm (H)
	Material	Aluminum alloy panel; fanless design
	Weight	1.3 kg /2.5 kg