PDS-GS1901T-HK

19“ rugged industrial panel display



Features:

19" TFT LED LCD

integrated resistive touchscreen

Robust all-aluminum structure for a broad range of applications

Long service life and high reliability

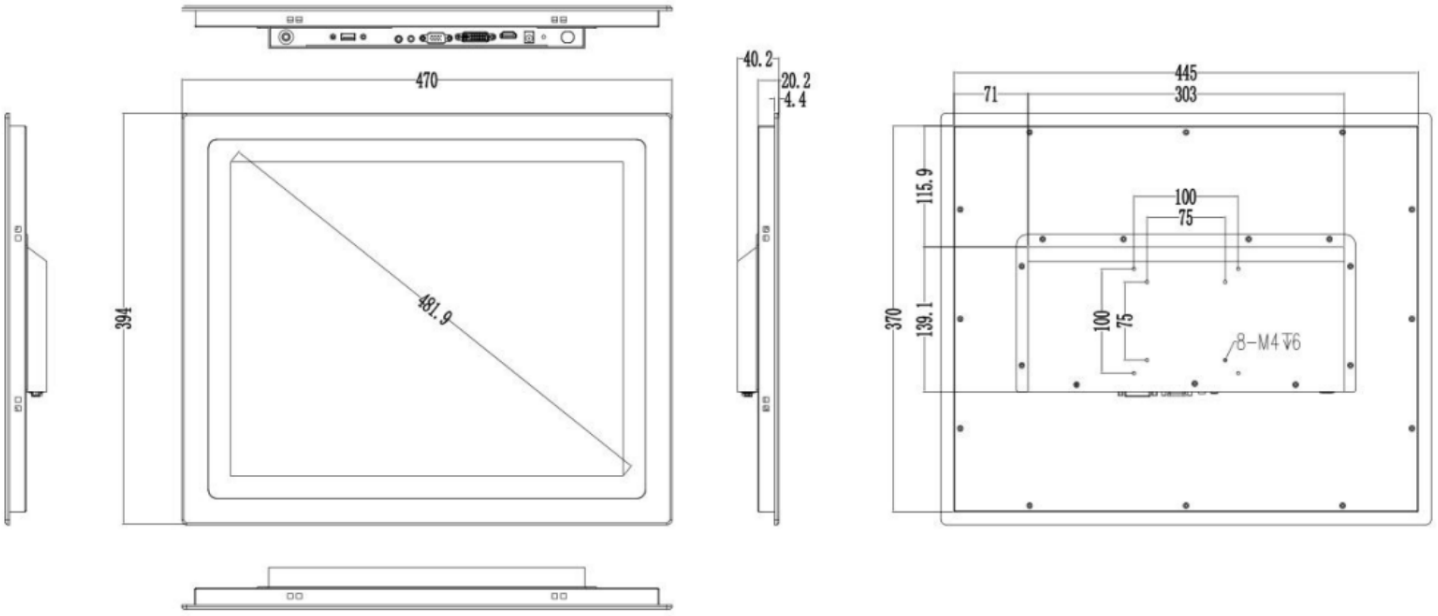
Fast response without trailing or flicker

Wide viewing angle for clear images at oblique angles

Specifications:

Display			
Display	19″ TFT LED	Contrast ratio	1000：1
resolution	1280*1024	touchscreen	resistive touchscreen
brightness	350 cd/m²	Display input	HDMI、DVI、VGA
Power			
Power	36W,100-240V input,12V output,DC5.5*2.1		
I/O interfaces			
USB	Touchscreen interface		
Environmental tests			
Vibration	5-19Hz/1.0mm amplitude; 19-200Hz/1.0g acceleration	Operating temp.	-30°C～50°C
Shock	10g acceleration, 11ms duration	Storage temp.	-30°C ～70°C
Reliability	MTBF≥50000h; MTTR≤0.5h	Operating humidity	95%@40°C, non-condensing
IP rating	Front panel IP65		
Physical			
Dimensions (L x W x H)	470*394*40.2mm	Material	Aluminum alloy panel; fanless design
Panel cutout	445*370mm	Color	Black
Weight	1.8kg/2.6kg(net/gross)		

Dimensions:


470
394
481.9
40.2
20.2
4.4
445
303
71
115.9
100
75
370
139.1
100
75
8-M4↧6